

SINGLE-CONDUCTOR CABLES INSULATED IN PFA T260°C

P0---

CE


Type of insulation:	PFA
Working temperature:	T 260°C
Type of conductor:	NICKEL-PLATED COPPER
Working voltage:	470/750 V
Cable nomenclature:	FR5P
In conformity to the standards:	CEI 20-51
In conformity to the requirements of the directives:	2006/95/EC
Approval marks:	IEMMEQU



- Sections table of the flexible conductor:

Code	Sections mm ²	Conductor strand	External diameter ±0,2 mm
P010-	0,50 mm ²	19 x 0,18	1,4
P017-	0,75 mm ²	19 x 0,23	1,6
P011-	1,00 mm ²	19 x 0,26	1,8

- Other sections on request.

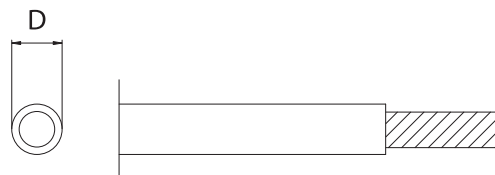

- Table of available colours:

T = transparent

B = white

L = blue

M = brown

N = black

- Other colours on request.

- IEMMEQU approval printing on the sheath.

Note: this kind of cables may be supplied in spools, rolls or cut and processed according to customer's request (for cable workings and terminals see "Section 8").