

MULTI-CONDUCTOR CABLES INSULATED IN PVC + PVC H03 T70°C

RR---

CE

Type of insulation: PVC + PVC
Working temperature: T 70°C
Type of conductor: RED COPPER
Working voltage: 300/300 V
Cable nomenclature: H03VV-F (for the round cables)
H03VVH2-F (for the flat cables)
In conformity to the standards: CEI 20-20
In conformity to the requirements of the directives: 2006/95/EC
Approval marks: IEMMEQU - <HAR>




• Sections and multiple table of the cores:

Code	Sections mm ²	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
RRP0-	2 x 0,50	16 x 0,20	l m	flat	3,2 x 5,2
RRP7-	2 x 0,75	24 x 0,20	l m	flat	3,5 x 5,6
RR27-	2 x 0,75	24 x 0,20	l m	round	∅ 5,4
RR37-	3 x 0,75	24 x 0,20	l m g	round	∅ 5,9
RR77-	3 x 0,75	24 x 0,20	l m n	round	∅ 5,9
RR47-	4 x 0,75	24 x 0,20	l m n g	round	∅ 6,4
RRQ7-	4 x 0,75	24 x 0,20	l m n e	round	∅ 6,4

• Other sections on request.

* Colours table of the cores:

l = blue m = brown g = yellow/green
n = black e = grey

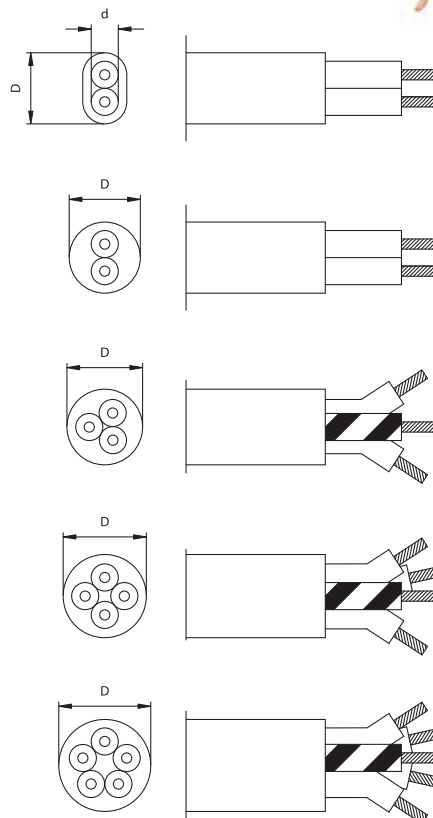

• IEMMEQU - <HAR> approval printing engraved, without ink, on the sheath.

• Table of available colours:

N = black
B = white
E = grey
O = oro
- Other colours on request.